

# autop Major 4030



## OPERATIVE RANGE:

Check-in, diagnostics and repair



## PARTICULAR FEATURES:

4-post electro-hydraulic lift with 4 t capacity

## APPLICATION:

The Major 4030 lifts are especially suitable for wheel alignment, service and inspection, repair of brakes, wheels, exhaust system, shock absorbers, transmission and differential.


3 versions are available, one with flush platforms and a length of 4.680 mm as well as two further versions with recesses in the front and with an adjustable plate for turntables for wheel alignment, with a platform length of 4.680 mm or 5.100 mm.

The high quality standard offers low operation and maintenance costs in the long term.

Recesses  $h = 22$  to  $50$  mm

Drive-on height only 160 mm with 760 mm long drive-on ramps

Fine-adjustable slip plates with a height of only 19 mm.

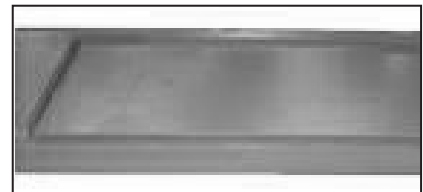



# autop Major 4030

<b>TECHNICAL DATA:</b>	<b>Major 4030</b>	Typ W:	Wheel alignment with front recesses and rear slip plates
Capacity:	4000 kg	Typ WL:	Wheel alignment with front recesses and rear slip plates and center plate
Lifting/Lowering time:	ca. 22 Sek.	Typ S:	flush platforms
Voltage:	230/400V/50Hz		
Motor:	3.0 kW		
Min/max pressure:	5.5 bar – 10.0 bar		

Model	A	B	C	D	E	F	G	H	I	J	K
4030-47S	3000	3422	4680	5564	762	450	550	805/1290			
4030-51S	3000	3422	5100	5984	762	450	550	805/1290			
4030-47 WL	3000	3422	4680	5984	762	450	550	805/1290	515	1110	1020
4030-51 WL	3000	3422	5100	5984	762	450	550	805/1290	515	1110	1020
Model											
4030-47S						550	2233	1780	140	130	
4030-51S						550	2233	1780	140	130	
4030-47 WL	510	200	1741	1741	1480	550	2233	1800	160	130	
4030-51 WL	510	200	1670	1670	1990	550	2233	1800	160	130	

## COMPONENTS:

- Easy adjustment to relevant track width
- Electro-hydraulic transmission with wire ropes
- Safety systems:
  - o Excentric brake system
  - o Obstruction system
  - o Pneumatic parking system
- Push- button control unit
- Cylinder with hard-chrome plated and teflon coated piston, integrated in the platform
- Cast iron pulleys and hardened axles
- Suitable for wheel alignment because platforms and traverses can be perfectly leveled

## OPTIONAL:




- Extended drive-on ramps
- Drive-through ramp
- Jacking beam Micro 20
- Jacking beam Micro 26
- Further accessories on request

## MOREOVER:

Our expert consultants would appreciate to help you with the planning of a new garage or the modernization of an existing one.

We offer to work out a workshop concept including an equipment proposal.

Please do not hesitate to contact us.

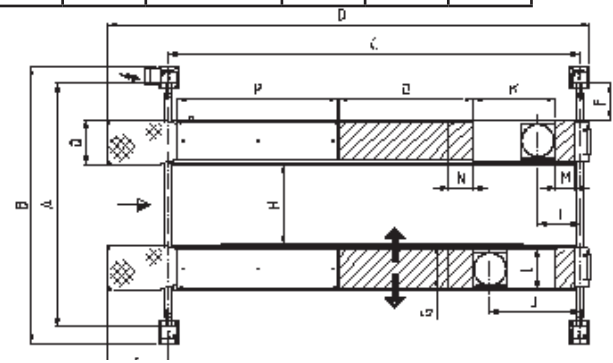

No liability accepted for specifications that are subject to alteration - validity 03/2011

## STANDARD COLOUR:

Posts RAL 9002 white

Platforms RAL 7016 grey anthracite

The data and pictures in this product information are not binding and are only giving an approximate description. Moreover we reserve the right of differences between the goods delivered and the data and pictures given here (i.e. technical data, equipment, material and optical appearance) so far as the differences are reasonable for the customer and a possible reduction in value or utility value of the goods delivered is not considerable

